

Deformable safety barrier, single sided for median application – Ground - Containment level H4b



Certified according	EN 1317-1/2
---------------------	-------------


Homologation according italian D.M. 223/92	In progress
--	-------------

CHARACTERISTICS

Weight	kg/m	148,64
Height out of ground	mm	1400 ± 30
Depth of fixing	mm	1000
Transversal overall dimensions	mm	1730
Center to Center distance between posts	mm	1333
Suggested minimum lenght	m	96,0 + end sections ⁽¹⁾
Steel quality		S235JR
Galvanisation		EN ISO 1461

PERFORMANCES

Containment level "Lc"	kJ	741,44 ⁽²⁾	Severity Index B
Acceleration Severity Index "ASI"		1,1	
Theoretical Head Impact Velocity "THIV"	km/h	26,0	
Post-impact Head Deceleration "PHD"	g	15,0	
Working Width and Class "W" (permanent Working Width ⁽³⁾)	m	Heavy vehicle	Light vehicle
		1,80 / W6 (1,80)	1,80 / W6
Maximum lateral position of the vehicle "VI" ⁽⁴⁾	m	Heavy vehicle	Light vehicle
		1,80	-
Dynamical Deflection "D" (Permanent Deflection)	m	Heavy vehicle	Light vehicle
		0,90 (0,83)	0,30 (0,11)
Vehicle Cockpit Deformation Index "VCDI"		LS0001000	

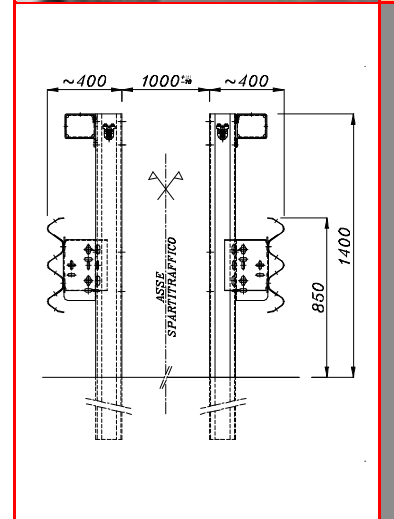


- (1) When not connected to other barriers, end sections are compulsory (both for start and end section).
- (2) Both the light and the heavy vehicle have been contained in the carriageway, inside the CEN box, without overturning; no ejection of main components, no intrusion of elements into the passenger compartment.
- (3) It is the distance between the barrier side facing the traffic before impact and the maximum permanent lateral position of any major part of the barrier.
- (4) Values according EN 1317-1/2:1998 and proposal for revision EN 1317-1/2:2006.



TEST REPORTS

Report N°	Test field - Laboratory	Date of the crash-test	Vehicle	Vehicle Mass (kg)	Impact speed (km/h)	Impact angle
TUB/BSI-114/1032	L.I.E.R. – Lyon (F)	27.07.06	Car	914	101,7	20,1°
TUB/BSI-112/1030	L.I.E.R. – Lyon (F)	26.07.06	Articulated HGV	37.280	66,4	20,0°

Deformable safety barrier, single sided for median application – Ground - Containment level H4b

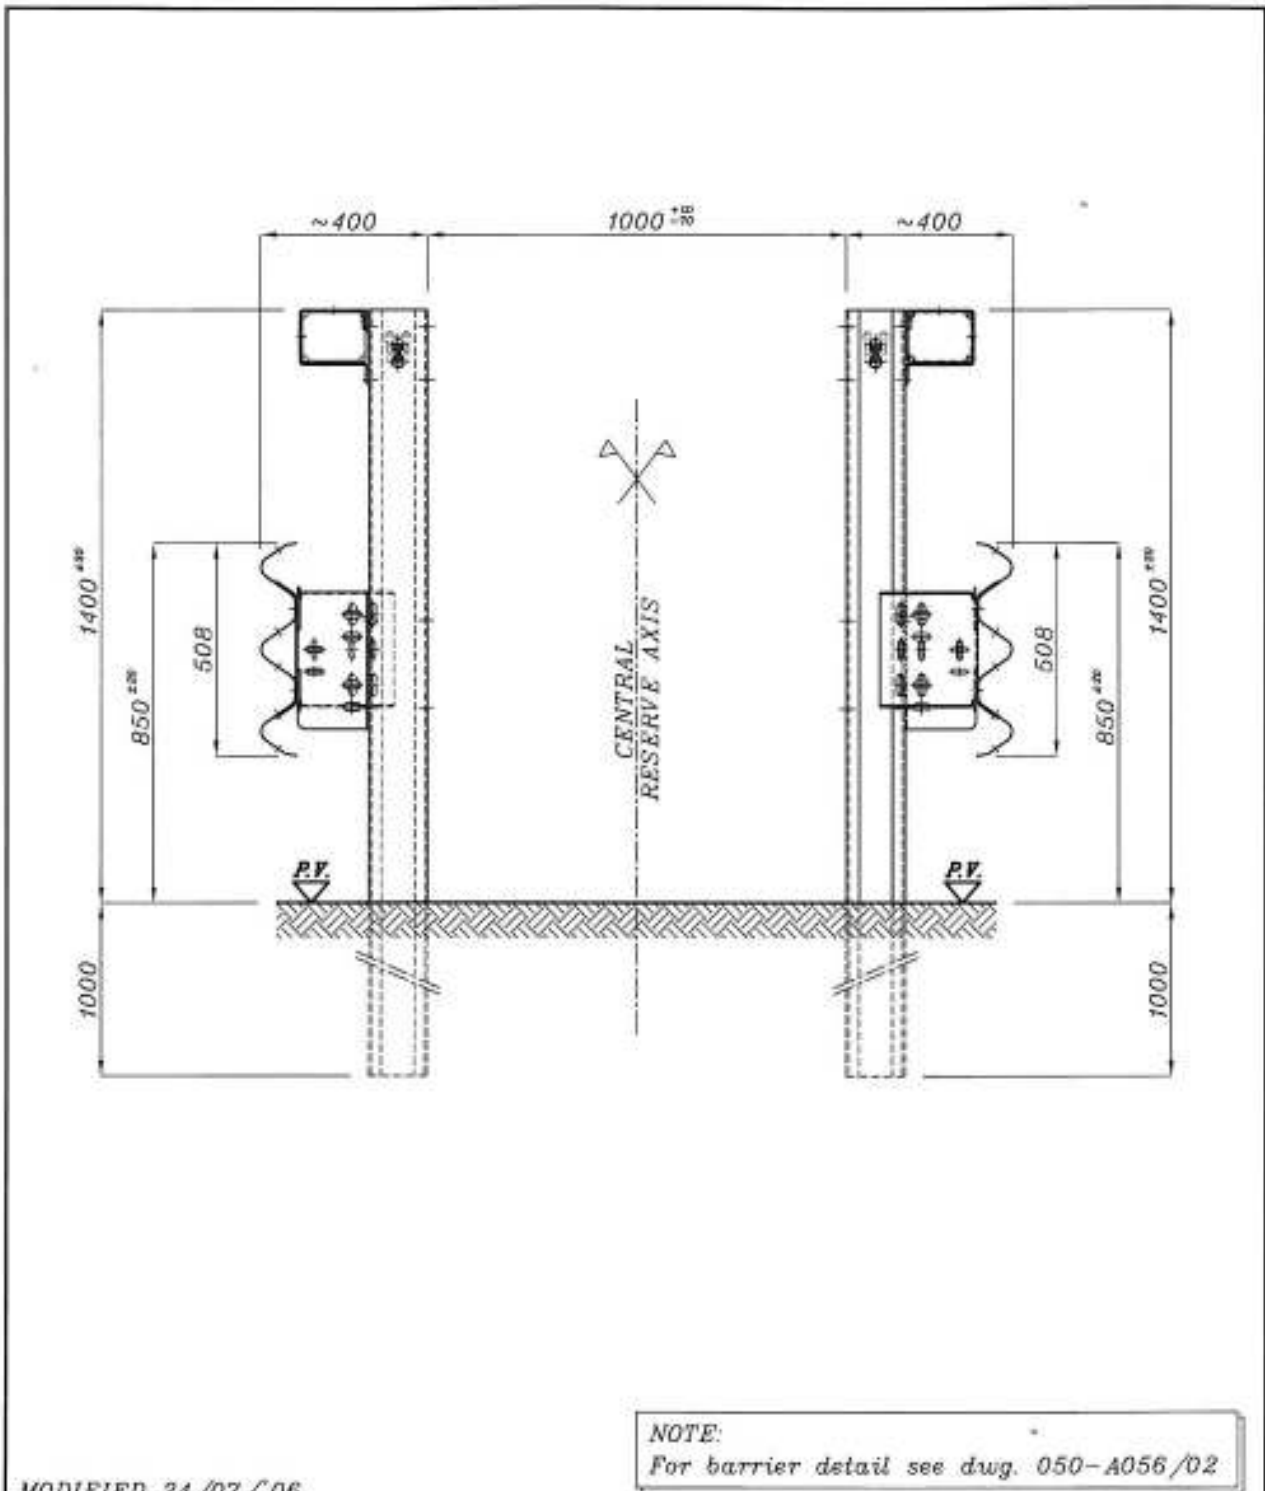

MODIFIED 24/07/06



Cas. Torino, 236 - 14100 Asti (Italia)
Tel. +390141418411 - Fax +390141211373
P.O. BOX 201

www.tubosider.com
E-Mail: utecnico@tubosider.it

CUSTOMER: /
SITE: /
SUBJECT:
DEFORMABLE SAFETY BARRIER, SINGLE SIDED,
FOR MEDIAN APPLICATION – GROUND
CONTAINMENT LEVEL H4b

Scale	1:15
Date	06/07/08
Order n°	/
Date Order	/

TOLERANCE: ±3%	Designer <i>R. Natta</i>	Draughtsman <i>R. Natta</i>	Approval <i>R. Natta</i>	Dwg n° 050-A059/02uk
----------------	-----------------------------	--------------------------------	-----------------------------	----------------------

3N.TU-brl.43 dwg. 050-A059/02

Deformable safety barrier, single sided for median application – Ground - Containment level H4b

